## F18 SB **GROUP SR 61** SANREMO Chromed brass grouphead with thermosiphonic circulation system optimized to maintain the ideal F.18 coffee extraction temperature \_Versions ENERGY SAVING SYSTEM 20,2 Insulation and smart energy management to save up more than 20% of energy 42.2 inches / 1071 mm 35.4 inches / 901 mm 25.5 inches /646,5 mm "TALL" VERSION 2 group 3 group 2 steam taps 2 steam taps l water tap water tap 1 one-cup portafilters 1 one-cup portafilters 3 two-cup portafilters 2 two-cup portafilters ALUMINIUM STANDARD VERSION **DIE-CAST LEGS** Machine support made in die-cast aluminium TALL VERSION CE \_Characteristics \_Colors MULTIFUNCTION DISPLAY Allows to monitor the right functioning of the machine and to program the PRESSURE GAUGE (Internet in the second $\mathbf{\hat{D}}$ Allows to monitor the inlet and

Matte black/Black RAL 9004

Matte black|White RAL 9004|9003

Matte black|Brown RAL 9004|8019

Matte black Rosso corsa RAL 9004

| _Technical data  |    | 2 group            | 3 group            |
|--|----|--------------------|--------------------|
| voltage  | ۷  | 220-240 1N 50/60Hz | 380-415 3N 50/60Hz |
| max total absorbed power/stream boiler heating element | kW | 3.1 /2.7           | 5.6/5.1            |
|  | kW | 4.4/4.0            | 6.5/6.0            |
|  | kW | 4.9/4.5            |                    |
| steam boiler capacity                                  | lt | 11.9               | 18.3               |
| pump power   | kW | 0.15               | 0.15               |
| cup-warmer power                                       | kW | 0.20               | 0.25               |
| net weight   | kg | 90                 | 103                |

All images are subject to illustrative purpose. The manufacturer reserves the right to modify without prior notice the technical characteristics indicated above.







STATIC RELAY BOILER TEMPERATURE Allows to regulate the temperature as accurately as possible thanks to the PID algorithm.

pump pressure during extraxtion.


ALUMINIUM DIE-CAST LEGS






PROGRAMMABLE ELECTRONIC PRE-INFUSION Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.





With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.



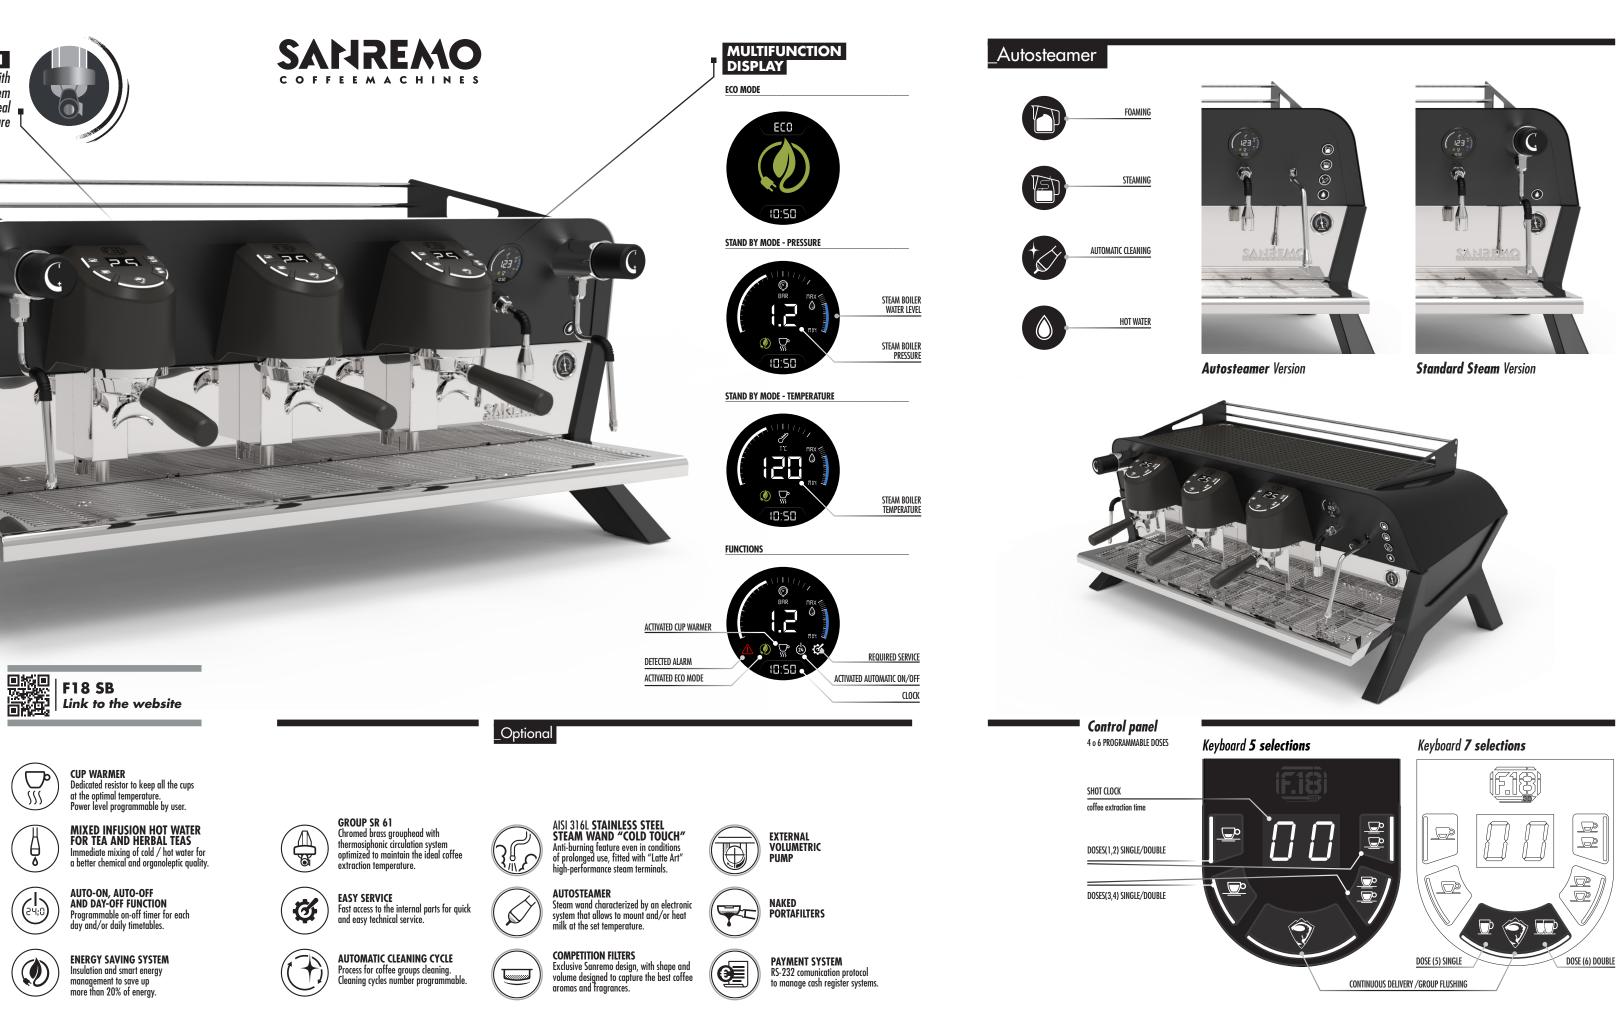







For more information about our coffee machines please contact us at comm.est@sanremomachines.com



## 

SANREMO coffee machines s.r.l. Via Giacomo Bortolan 52 31050 Vascon di Carbonera [TV] — ITALY T +39 0422 448900 F +39 0422 448935 www.sanremomachines.com

Sanremo Coffee Machines s.r.l. has a certified Quality Management System according to UNI EN ISO 9001:2015 standard.





